

As the most technologically advanced Laser Screed® machine available in the world, the S-28EZ is packed with features that give you the competitive advantage.

Equipped with 360° machine rotation, a 25'/7.62m telescopic boom and your choice of pivoting screed heads, **the S-28EZ continues the tradition of delivering the industry's highest quality and production rates with unsurpassed maneuverability.** The customized OASIS laser control system is simple to operate and is upgradeable as technology advances. A redesigned, EZ Clean Head reduces clean-up time and improves long term maintenance. New easy access features improve ergonomics around the machine and operator efficiency.

The S-28EZ options platform allows you to build the machine you need to meet your demands. Options include, but are not limited to: 12' or 14' head width, roller plow, spray bar and the **Somero® Floor Levelness System®.**

**Contact us today at Sales@Somero.com / 1-239-210-6519
or visit www.SOMERO.COM to learn more!**

FEATURES/BENEFITS:


**denotes new standard features*

- > Full Color LCD Display w/ Integrated Diagnostics
- > EZ Clean Screed Head*
- > Head Transport Stands*
- > Column-Block Protection
- > 360° Machine Rotation
- > Soft Landing
- > Hydraulic Screed Head Rotation
- > Hydraulic Pressure Washer (3,000 PSI/207 Bar) & Hose Reel*
- > Somero® Quick GradeSet System™
- > LED Work Lights & Compartment Lighting*
- > Built-In Storage
- > Automatic Throttle
- > Programmable Quick Pass
- > Illuminating Fuse Panel*
- > OASIS Laser Control System
- > Hydraulic Oil Pre-Heater
- > 4-Wheel & Crab Steering
- > Operator Heat

SPECIFICATIONS:

| | |
|---|--|
| WEIGHT | 17,880 lbs / 8,100 kg (with 12' / 3.7 m Screed Head) |
| WIDTH | 7'3" / 2.2 m |
| HEIGHT | 8' 9" / 2.67 m |
| LENGTH | 31' 6" / 9.67 m (transport mode with 12' / 3.7 m screed head) |
| ENGINE | Kubota 74 Hp Stage 5 Engine |
| SELF-PROPELLED | Standard |
| SCREED HEAD WIDTH STANDARD OPTIONAL | 14'5" / 4.4 m (15'5" / 4.7 m with flip down plow) 16'6" / 5.02 m (17'6" / 5.33 m with flip down plow) |
| VIBRATOR WIDTH STANDARD OPTIONAL | 12' / 3.7 m 14' / 4.3 m |

**Engine options & requirements vary based on location. Contact Sales for more information.*

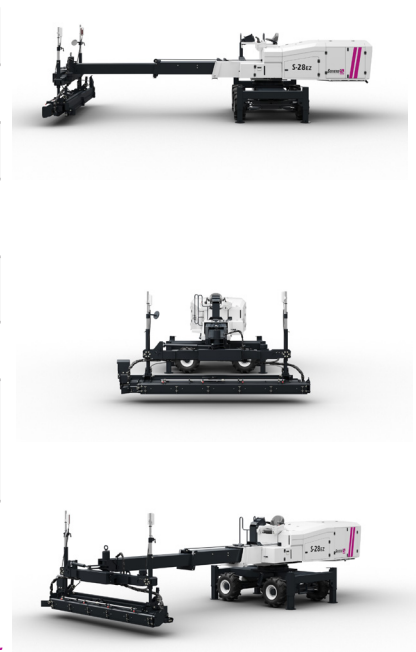

OPTIONS:

- Floor Levelness System
- Spare Tire / Wheel Assembly
- Spare Auger Kit, 12'
- Spare Auger Kit, 14'
- Hub Caps
- Hydraulic Fitting Kit
- Spare Hydraulic Hose Kit
- Tripod Kit
- Column Clamp
- Umbrella Kit